



Serio

Recessed luminaires installed at ground and floor levels exhibit varying degrees of resistance to torsion and shear forces, withstanding up to 2000 kg, in compliance with the EN 60598-2-13 standard.




Key features

- The body is made from die-cast aluminum with a 304 stainless steel frame.
- Features a 10mm thick hardened tempered glass, ensuring compliance with the IK10 standard test.
- Offers multiple optics options, providing high visual comfort and effective anti-glare performance.
- Includes a high temperature resistant and waterproof silicone rubber ring, with a corrosion-resistant PP plastic installation housing.
- Suitable for floor, ground, or wall-mounted recessed applications as required.
- Ensures no photo-biological risk, in accordance with EN 62471:2008.
- All external screws are made from 304 stainless steel.

Installation

Installation can be done on floors, walls, or ground, offering versatile applications for a cohesive and continuous design.

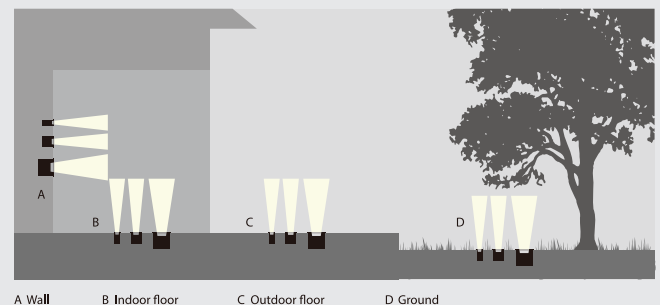


Materials


We select the highest quality materials to ensure exceptional product performance. Our products feature robust tempered glass with IK10 protection, durable PP plastic installation housings, and specially designed optics to maintain superior fixture performance levels.



Temperature < 40° C



Diffuser optics versions complete with non-slip glass



Resistance to static load (5000 Kg)

Photometry

"A" Type

Honeycomb louvre




α 25°
50°

"B" Type

Diffuser optics





α 120°

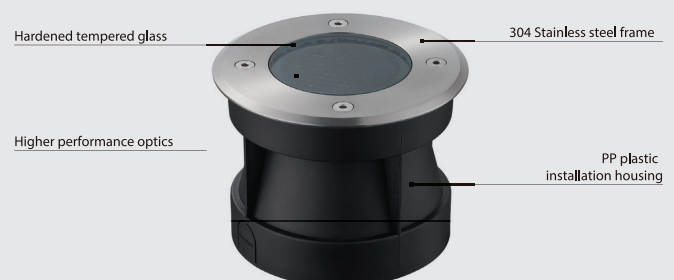


Dimensions and Technical Data

Serio 03




Code	Power	LED Qty	Control Options	Input Voltage	Optics	Weight
Serio-LED-6-3	6W	3	Switch	DC 24V / AC 100-240V	25° / 50°	5
Serio-LED-6-RGBW-3	6W	3	DMX	DC 24V / AC 100-240V	25° / 50°	5
Serio-LED-6-A-3	6W	3	Switch	DC 24V / AC 100-240V	25° / 50°	5
Serio-LED-6-RG-BW-A-3	6W	3	DMX	DC 24V / AC 100-240V	25° / 50°	5
Serio-LED-3-B-18	3W	18	Switch	DC 24V / AC 100-240V	120°	5
Serio-LED-3-RGBW-B-3	3W	3	DMX	DC 24V / AC 100-240V	120°	5

Serio 04




Code	Power	LED Qty	Control Options	Input Voltage	Optics	Weight
Serio-LED-12-6	12W	6	Switch	DC 24V / AC 100-240V	25° / 50°	6.1
Serio-LED-12-RGBW-6	12W	6	DMX	DC 24V / AC 100-240V	25° / 50°	6.1
Serio-LED-12-A-6	12W	6	Switch	DC 24V / AC 100-240V	25° / 50°	6.1
Serio-LED-12-RG-BW-A-6	12W	6	DMX	DC 24V / AC 100-240V	25° / 50°	6.1
Serio-LED-6-B-28	6W	28	Switch	DC 24V / AC 100-240V	120°	6.1
Serio-LED-6-RG-BW-B-6	6W	6	DMX	DC 24V / AC 100-240V	120°	6.1

Serio 05




Code	Power	LED Qty	Control Options	Input Voltage	Optics	Weight
Serio-LED-25-12	25W	12	Switch	DC 24V / AC 100-240V	25° / 50°	9.4
Serio-LED-25-RGBW-12	25W	12	DMX	DC 24V / AC 100-240V	25° / 50°	9.4
Serio-LED-25-A-12	25W	12	Switch	DC 24V / AC 100-240V	25° / 50°	9.4
Serio-LED-25-RG-BW-A-12	25W	12	DMX	DC 24V / AC 100-240V	25° / 50°	9.4
Serio-LED-12-B-48	12W	48	Switch	DC 24V / AC 100-240V	120°	9.4
Serio-LED-12-RG-BW-B-12	12W	12	DMX	DC 24V / AC 100-240V	120°	9.4

Serio 06



Code	Power	LED Qty	Control Options	Input Voltage	Optics	Weight
Serio-LED-40-18	40W	18	Switch	DC 24V / AC 100-240V	25° / 50°	11
Serio-LED-40-RG-BW-18	40W	18	DMX	DC 24V / AC 100-240V	25° / 50°	11
Serio-LED-40-A-18	40W	18	Switch	DC 24V / AC 100-240V	25° / 50°	11
Serio-LED-40-RG-BW-A-18	40W	18	DMX	DC 24V / AC 100-240V	25° / 50°	11

Serio 07



Code	Power	LED Qty	Control Options	Input Voltage	Optics	Weight
Serio-LED-60-28	60W	28	Switch	DC 24V / AC 100-240V	25° / 50°	9.8
Serio-LED-60-RG-BW-28	60W	28	DMX	DC 24V / AC 100-240V	25° / 50°	9.8
Serio-LED-60-A-28	60W	28	Switch	DC 24V / AC 100-240V	25° / 50°	9.8
Serio-LED-60-RG-BW-A-28	60W	28	DMX	DC 24V / AC 100-240V	25° / 50°	9.8