




# Tilto


Featuring a purpose-built optical design, this luminaire delivers optimal visual comfort by minimizing glare and reducing light pollution. Its adjustable light direction allows precise illumination tailored to the needs of each environment.

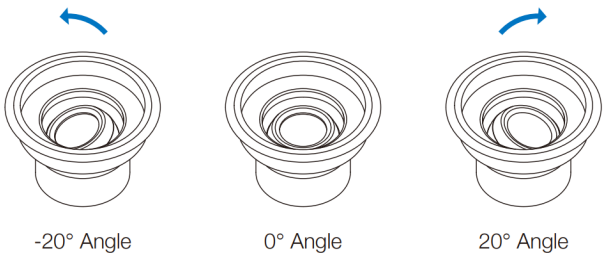

## Key features

- Stainless steel type 304 body and installation housing, Pure aluminium construction fixture body.
- Clear tempered glass 15 mm, the static load of the luminaire can resistance 5000kg.
- The lighting module has tilt adjustable system, with high performance optics.
- Snap-in installation with no exposed hardware, allowing continuous runs in standard lengths.
- Supplied with oil- and water-resistant components, ensuring safe and reliable operation.
- The maximum surface temperature of all touchable parts remains below 50°C, ensuring safety and reliability..
- All external screws are made of 304 stainless steel.
- The luminaire technical characteristics conform to EN 60598-1 standards

## Dimensions

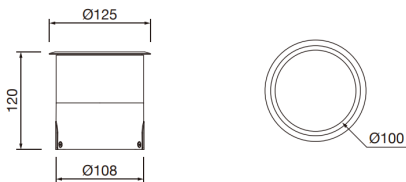

## Technical Data

Code	Power	LED Qty	Control Options	Input Voltage	Optics	Weight
Tilto-LED-10	10W	1	Switch	DC 24V	30°	9.8

