



Tomo


Key features

- Constructed from die-cast aluminum with super white tempered glass, its distinctive design is available in two size options
- PC lens optics provide comfortable visual performance with excellent glare control and multiple light distribution options
- Equipped with high-quality LED chips and control compatibility for ON-OFF, 0-10V, DALI, or custom programming, along with surge protection up to 20kV
- A variety of mounting brackets allows integration into different urban or industrial applications
- Finished with anti-UV pure polyester powder coating, offering corrosion resistance exceeding 1000 hours in salt spray testing
- Certified as risk-free under EN 62471:2008 for photobiological safety
- All external screws are made of corrosion-resistant 304 stainless steel


Applications

- Courtyards
- Residential areas
- Parks
- Pedestrian streets

Technical Data & Dimensions

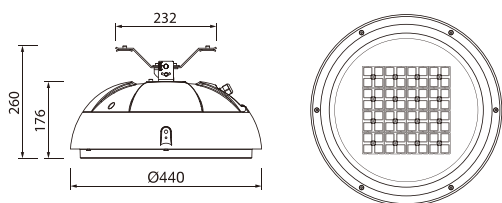

Code	Power	LED Qty	Optics	Weight
Tomo-LED-100-48	100W	48	T1/T2A/T3A/T4A	7.5
Tomo-LED-120-48	120W	48	T1/T2A/T3A/T4A	7.5
Tomo-LED-150-64	150W	64	T1/T2A/T3A/T4A	7.5

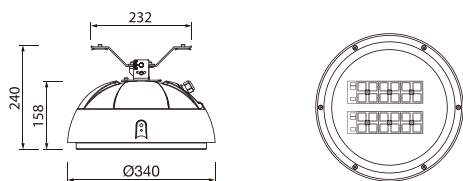

Code	Power	LED Qty	Optics	Weight
Tomo-LED-60-24-S	60W	24	T1/T2A/T3A/T4A/ T2W	6.5
Tomo-LED-75-36-S	75W	36	T1/T2A/T3A/T4A/ T2W	6.6



Photometry

