



# Piza Wall Washer

PIZA is an innovative LED wall washer designed for landscape lighting. PIZA offers a variety of optic options, ranging from narrow beams to wide beams, catering to diverse lighting needs. With three different light emitting modes available - single white, RGB, and RGBW - as well as compatibility with both DALI and DMX control systems, PIZA is versatile and suitable for a wide range of applications.

PIZA's flexible design allows for multiple installation options and comes with a range of accessories, making it the ideal choice for creating stunning lighting designs for building facades.




## Key features

- Different beam angles
- Color options: single white, RGB, RGBW
- Smart control: DALI, DMX control
- Multiple installation methods optional
- Anti-glare accessories are available
- Excellent heat dissipation for longer service life

## Applications

- Facades
- Square
- Plaza
- Business street
- Park
- Advertising board
- Bridge


## Accessories

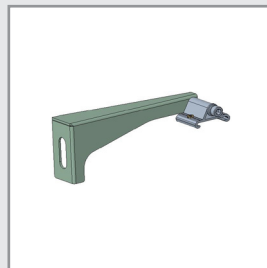


**L bracket**  
100mm, 140mm, 180mm




**Ceiling mount bracket**  
60mm, 120mm, 180mm

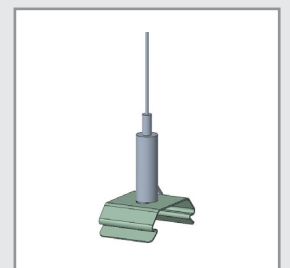


**Suspension kit 1**

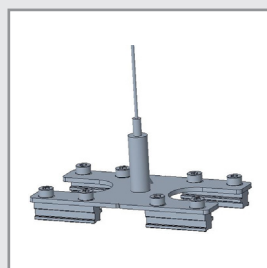

**Suspension kit 2**



**Visor**



**Anti-glare film**

## Technical Data @4000k



<b>Model No.</b>	PIZA 018 AC Input	PIZA 36 AC Input	PIZA 18 DC Input	PIZA 36 DC Input
<b>Power Consumption</b>	18W	36W	18W	36W
<b>Power Supply</b>	BOKE	BOKE	/	/
<b>Input Voltage</b>	220-240VAC, 50 / 60 Hz		24 Vdc	24 Vdc
<b>Power Factor</b>	>0.90	>0.90	/	/
<b>Surge Protection</b>	2kV line-line, 2kV line-earth		/	/
<b>Driver Type</b>	Constant current (CC)/ Constant voltage (CV)		Constant voltage (CV)	
<b>Control</b>	DALI/DMX control		DMX control	

## Optic Information

<b>LED Type</b>	LED 3535			
<b>Luminous Flux (±10%)</b>	1620lm	3240lm	1800lm	3600lm
<b>Efficacy(4000K Ra70)</b>	90lm/W	90lm/W	100lm/W	100lm/W
<b>Correlated Color Temperature</b>	4000K (2200K, 3000K, 5000K optional), RGB, RGBW			
<b>Color Rendering Index</b>	Ra80 (Ra70, Ra90 optional)			
<b>Beam Angle</b>	White: F00111, F00113, F00114, F00115, F00116, F00117 RGB/RGBW: F00121, F00122, F00123, F00124			


## Dimensions and Mounting

<b>Product Dimension</b>	508x121x79mm	998x121x79mm	508x121x79mm	998x121x79mm
<b>Luminaire Net Weight</b>	1.9 kg	2.9 kg	1.7 kg	2.7 kg
<b>Mounting Option</b>	Bracket Mounting / Ceiling Mounting / Suspension Mounting			
<b>Material</b>	Aluminum Alloy / Polycarbonate Optical Lens / Glass			
<b>Finish</b>	Powder Coating			
<b>Fixture Color</b>	RAL 9017 Traffic Black			
<b>EPA</b>	0.027m <sup>2</sup>	0.054m <sup>2</sup>	0.027m <sup>2</sup>	0.054m <sup>2</sup>
<b>IK Rating</b>	IK08			
<b>IP Rating</b>	IP66			

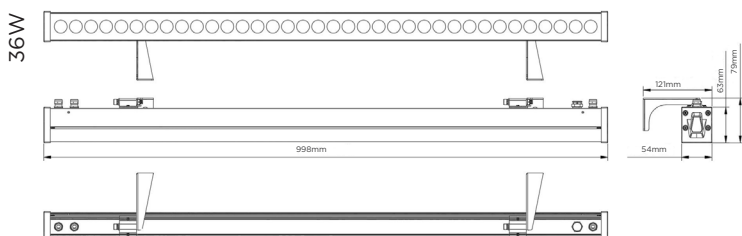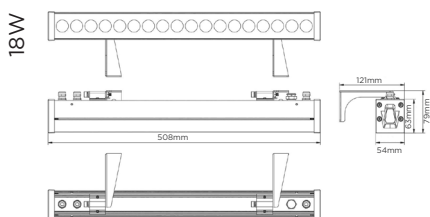


## Photometry

For single white

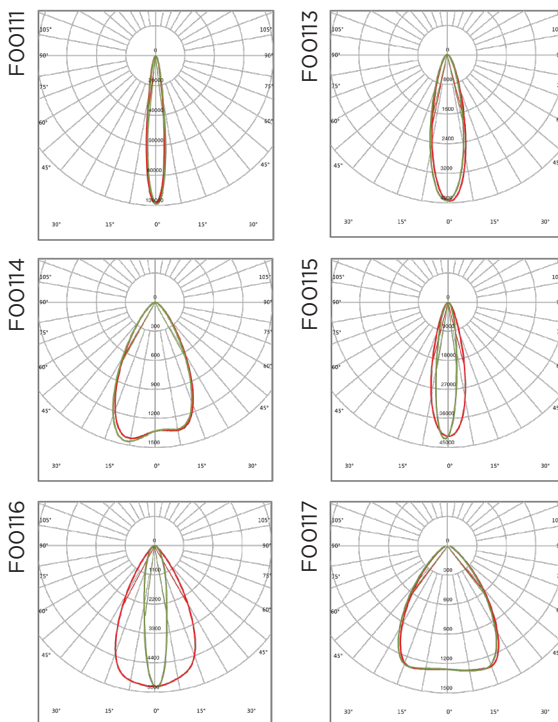

For RGB/RGBW

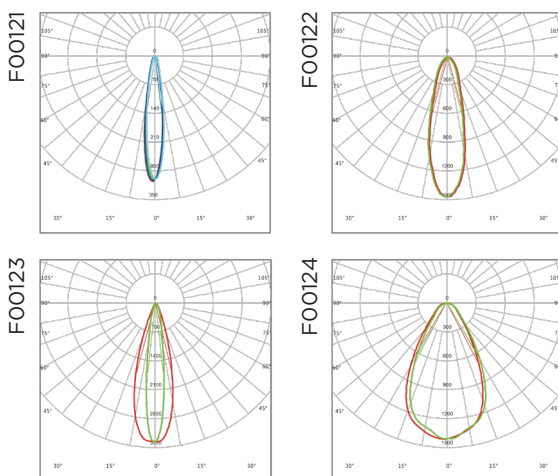

## Lifespan and Warranty

**Operating Temperature** -20°C to + 45°C

**Lifetime of LED @ Ta=25°C** 57.500hrs-L80

**Warranty** 5 Years

## Mounting Option

