



Stepo




Key features

- Constructed with a die-cast aluminum body and a high-quality PC diffuser
- Features side radial lighting with bidirectional emission, providing high visual comfort and effective anti-glare properties
- Equipped with a high-temperature resistant, waterproof silicone rubber ring, and a hot-galvanized steel installation housing
- Suitable for recessed installation in floors, ground surfaces, and walls, depending on application needs
- Compliant with EN 62471:2008, ensuring no photo-biological risk
- All external screws are made from 304 stainless steel

Dimensions

All measurements are given in millimeters.

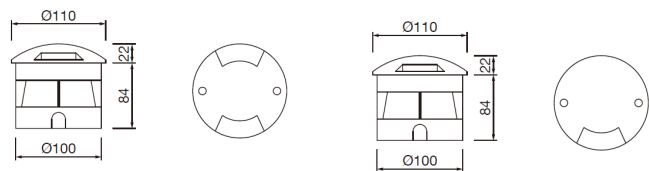

Technical Data

Code	Power	Lumen	Control Options	Input Voltage	Optics
Stepo-LED-2-8	2W	120lm	Switch	24V DC / 230V AC	120°
Stepo-LED-1-4	1W	60lm	Switch	24V DC / 230V AC	120°

