



Runo




Key features

- Constructed with a die-cast aluminum body and a high-quality polycarbonate (PC) diffuser
- Features side radial lighting with bidirectional emission, delivering high visual comfort and effective glare control
- Includes a high-temperature-resistant and waterproof silicone rubber gasket, paired with a hot-dip galvanized steel installation housing
- Designed for recessed installation in floors, ground surfaces, or walls, depending on application requirements
- Fully compliant with EN 62471:2008, ensuring no photobiological risk
- All external screws are made of corrosion-resistant 304 stainless steel
- Offered in 3000K warm white and blue for accent lighting

Dimensions

All measurements are given in millimeters.

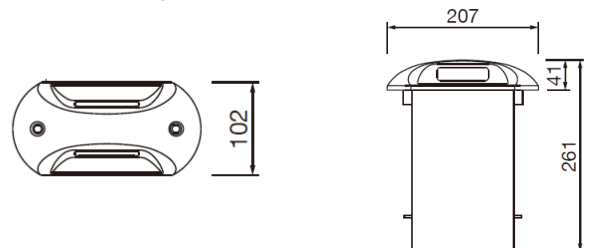

Technical Data

Code	Power	LED Qty	Control Options	Input Voltage	Optics
Runo-LED-2-16	2W	16	Switch	24V DC / 230V AC	120°