



# Otta

OTTA is a modern freestanding lamp composed of a slim lamp body, vertical pole, and stable base—ideal for contemporary office spaces.

Featuring precise optics (UGR<14) with 75% upward and 25% downward light distribution, it ensures uniform and comfortable illumination. Equipped with plug-in connectivity, 0-10V touch dimmer, light sensor, PIR motion sensor, and USB port.


All functions are activated via a single button, after which the luminaire operates fully automatically. Its control modules are interchangeable, offering flexibility and long-term adaptability.



## Key features

- Easy for assembly and maintenance
- Precise optical design: UGR<14, up 75% & down 25% lighting
- Lighting sensor and PIR sensor mode interchangeable
- Plug and play, convenient for different position
- Touchable 0-10V dimming way
- USB charging function type and Non-USB type are optional

## Mounting



Floor standing



Desk fixing

## Applications

- Office
- Meeting room
- Hotel

## Technical Data

<b>Model No.</b>	OTTA-75W -DOS	OTTA/B-75W -DOS	OTTA/C-75W -DOS	OTTA/D-75W -DOS
<b>Power Consumption</b>	75W			
<b>Input Voltage</b>	AC220-240V			
<b>Power Factor</b>	0.93			
<b>Control</b>	0-10V			
<b>Sensor</b>	PIR sensor / Light sensor			
<b>LED Driver</b>	Driver built-in			

## Optic Information

<b>LED Type</b>	SMD 2835
<b>Luminous Flux (±5%)</b>	7200-8200lm
<b>Correlated Color Temperature</b>	1-CCT: 3000K/4000K/5000K/5700K
<b>Color Rendering Index</b>	Ra80
<b>Beam Angle</b>	120°
<b>UGR level</b>	<14

## Dimensions and Mounting


<b>Product Dimension</b>	1925x720x340mm	1288x720x340mm
<b>Luminaire Net Weight</b>	2.7kg	
<b>Floor Standing Net Weight</b>	6.7kg	
<b>Mounting Option</b>	Pedestal mounted / Desktop mounted	
<b>Material</b>	PMMA / Aluminum	
<b>Finish Color</b>	White RAL 9016	
<b>Protection Class</b>	Class 1	
<b>IP Rating</b>	IP20	

## Lifespan and Warranty


<b>Operating Temperature</b>	-10°C to 30°C
<b>Storage Temperature</b>	-20°C to 60°C
<b>Lifetime of LED</b>	50,000h
<b>Warranty</b>	5 Years

## Dimensions

OTTA  
OTTA/B

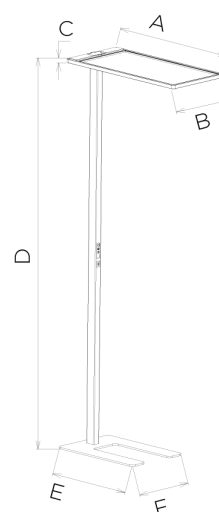

OTTA/C  
OTTA/D

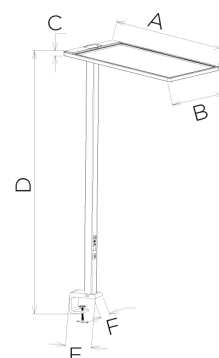

Type	A (mm)	B (mm)	C (mm)
OTTA A/B	720	340	21.5
OTTA C/D	720	340	21.5

Type	D (mm)	E (mm)	F (mm)
OTTA A/B	1900	500	340
OTTA C/D	1276	100	70