

Món

Versatile LED lamp for reception and meeting spaces. Microprismatic diffuser ensures uniform, glare-free light. Suitable for ceiling or suspension installation, customizable in size and color. Extruded aluminum structure.



Technical Data

	CEILING LIGHT			
Model No.	MNN003XX	MNN004XX	MNN007XX	MNN008XX
Power Consumption (±5%)	50W	50W	80W	80W
Luminous Flux	6000 lm	6250 lm	9600 lm	10000 lm
Luminous Efficacy	120 lm/W	125 lm/W	120 lm/W	125 lm/W
Correlated Color Temperature	3000 K	4000 K	3000 K	4000 K
Control	DALI version available for all codes			




Technical Data

	SUSPENDED LIGHT				DIRECT LIGHT		DIRECT-INDIRECT LIGHT	
Model No.	MNN001XX	MNN002XX	MNN005XX	MNN006XX	MNN009XX	MNN010XX		
Power Consumption (±5%)	50W	50W	80W	80W	50W + 40W	50W + 40W		
Luminous Flux	6000 lm	6250 lm	9600 lm	10000 lm	6000+4800 lm	6250+5000 lm		
Luminous Efficacy	120 lm/W	125 lm/W	120 lm/W	125 lm/W	120 lm/W	125 lm/W		
Correlated Color Temperature	3000 K	4000 K	3000 K	4000 K	3000 K	4000 K		
Control	DALI version available for all codes							



Dimensions and Mounting

Version	W (mm)	H (mm)	Weight
50W	Ø580	35	7 kg
80W	Ø780	35	9 kg
50W + 40W	Ø600	75	10 kg

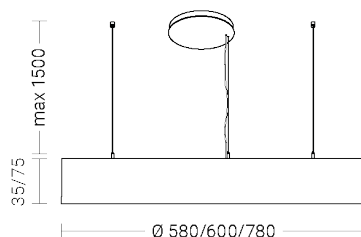

Photometry

