



Viva

VIVA features high-lumen SMD LEDs and lightweight fire-rated materials for enhanced heat and corrosion resistance. The detachable base and shade allow for easier installation and maintenance.


Key features

- Modular design, driver and lamp base can be easily replaced
- High lumen SMD 100lm/W
- IP54

Applications

- Office
- Supermarket
- School
- Hotel
- Public Areas

Dimensions

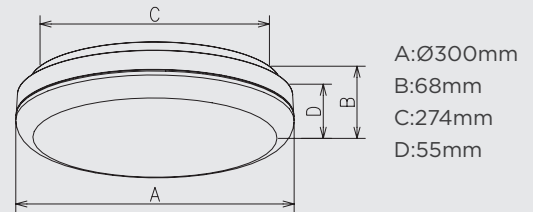

Technical Data

| | |
|-------------------|--------------|
| Model No. | VIVA-12-24 |
| Power Consumption | 24W |
| Input Voltage | AC200 - 240V |
| Power Factor | 0.9 |
| Dimmable | Non-dimmable |

Optic Information

| | |
|------------------------------|---------------|
| LED Type | SMD |
| Luminous Flux | 2300 - 2600lm |
| Correlated Color Temperature | 3000K |
| Color Rendering Index | Ra80 |
| Beam Angle | 120° |

Dimensions and Mounting

| | |
|----------------------|--------------------|
| Product Dimension | Ø300x68 mm |
| Luminaire Net Weight | 0.80 kg |
| Mounting Option | Surface mount |
| Material | Polycarbonate (PC) |
| Finish Color | White RAL 9016 |
| Protection Class | Class 2 |
| IP Rating | IP54 |

Lifespan and Warranty

| | |
|-----------------------|---------------|
| Operating Temperature | -20°C to 45°C |
| Storage Temperature | -20°C to 60°C |
| Lifetime of LED | 50.000hrs |
| Warranty | 3 Years |