



# Dona



This is a ceiling light that separates the main light and auxiliary light, the main light lighting area is concave design, so the proportion of side ambient light is decreased, which will reduce light pollution to the space and create softer atmosphere.




## Key features

- Rotate design for quick install, available for both rear and side cable entry
- The wavy lines of diffuse reflection create a soft and warm atmosphere
- Interchangeable CCT(3000K+4000K+5700K) by slide switch
- IP54 for the whole lamp
- Internal flicker free driver

## Applications

- Public Areas
- Hotel
- Corridors
- Stairway
- Lobby

## Dimensions

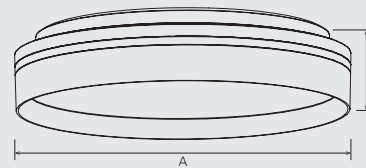

A: Ø300mm x  
B:71 mm

## Technical Data

Model No.	DONA-12-20
Power Consumption	20W
Input Voltage	AC200 - 240V
Power Factor	0.9
Dimmable	Non-dimmable

## Optic Information

LED Type	SMD
Luminous Flux	2000 - 2200lm
Correlated Color Temperature	3000K
Color Rendering Index	Ra80
Beam Angle	110°

## Dimensions and Mounting

Product Dimension	Ø300x71 mm
Luminaire Net Weight	1 kg
Mounting Option	Surface mount
Material	Polycarbonate (PC)
Finish Color	White RAL 9016
Protection Class	Class 2
IP Rating	IP44
IK Rating	IK06

## Lifespan and Warranty

Operating Temperature	-20°C to 45°C
Storage Temperature	-20°C to 65°C
Lifetime of LED	50.000hrs
Warranty	3 Years