



Finestra Ring LED



The Finestra Ring LED lamp is a versatile lighting solution for various indoor spaces. It features a modern design with a powder-painted aluminum housing and options for different diffusers. With its efficient LED light source and high lumen output, this lamp provides bright and uniform illumination.


Key features

- Universal plafond suitable for LED light sources
- Powder-painted aluminum housing with a steel sheet base
- Available with OPAL or microprismatic MPRM diffuser
- Various sizes and lumen outputs available

Applications

- Office
- Conference rooms
- Schools
- Retail spaces
- Corridors
- Hallways

Dimensions

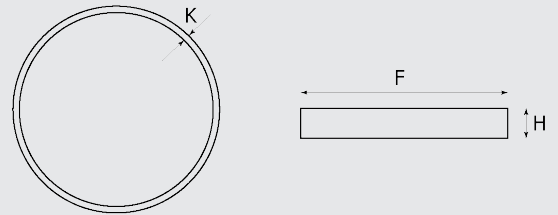

Technical Data

| | | | | |
|--------------------------|--------------|-----|-----|------|
| Power Consumption | 16W | 37W | 57W | 100W |
| Input Voltage | AC220 - 240V | | | |

| | |
|-------------------------------|------------------------------|
| FINESTRA RING LED 16W | H 66 x F 320 x K 13mm |
| FINESTRA RING LED 37W | H 66 x F 440 x K 13mm |
| FINESTRA RING LED 37W | H 66 x F 520 x K 13mm |
| FINESTRA RING LED 37W | H 110 x F 630 x K 13mm |
| FINESTRA RING LED 57W | H 110 x F 800 x K 13mm |
| FINESTRA RING LED 100W | H 110 x F 1065 x K 13mm |

Optic Information

| | |
|-------------------------------------|------------------|
| LED Type | LED |
| Cover | OPAL / MPRM |
| Color Rendering Index | Ra84 |
| Efficacy | 102lm/W - 137m/W |
| Luminous Flux | 1700lm - 12250lm |
| Correlated Color Temperature | 3000K / 4000K |
| MacAdam | SDCM 3 |

Mounting

| | |
|-------------------------|----------------------------------|
| Weight | 1.90kg - 13.20kg |
| Mounting Option | Surface mount Suspended mount |
| Material | Aluminium |
| Color | Grey |
| Protection Class | Class 1 |
| IP Rating | IP20 |

Lifespan and Warranty

| | |
|------------------------|--------------------|
| Lifetime of LED | >72.000h - L80 B10 |
| Warranty | 5 Years |