




Volba

This ceiling light is a super slim design fixture. High lumen SMD LED and lighter weight fire-rated material to ensure better heat resistance and corrosion resistance. The color is interchangeable within 3000K and 4000K by slide switch, also dimmable with triac dimmers. Multi-functional design shares great popularity.


Best quality for this price

Key features

- High lumen efficiency
- Interchangeable CCT with slide switch
- IP54
- Triac dimming
- Internal driver

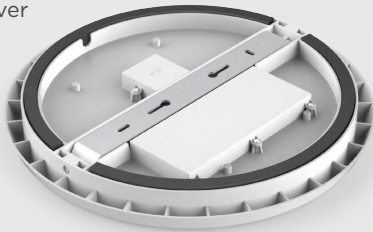

Dimensions

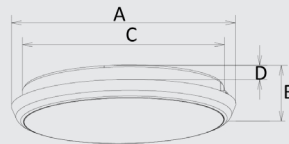

Type	A (mm)	B (mm)	C (mm)	D (mm)
VOLBA-10-12W	250	48	221	15
VOLBA-14-25W	350	40	321	12

Applications

- Office
- Supermarket
- School
- Hotel
- Stairway
- Lobby
- Corridors

Technical Data

Model No.	VOLBA-10-12W	VOLBA-14-25W
Power Consumption	12W	25W
Input Voltage	AC200 - 240V	
Power Factor	0.9	
Control	Dimmable with Triac	

Dimensions and Mounting

Product Dimension	Ø250x48mm	Ø350x40mm
Luminaire Net Weight	0.66kg	1.3kg
Mounting Option	Surface mount	
Material	Polycarbonate (PC)	
Finish Color	White RAL 9016	
Protection Class	Class 2	
IP Rating	IP54	
IK Rating	IK10	

2-CCT in 1 Lamp

A side switch allows for an instant transition of color temperature.



Optic Information

LED Type	SMD	
Luminous Flux	1140 - 1270lm	2300 - 2575lm
Correlated Color Temperature	CCT: 3000K + 4000K	
Color Rendering Index	Ra80	
Beam Angle	120°	

Lifespan and Warranty

Operating Temperature	-20°C to 45°C
Storage Temperature	-20°C to 65°C
Lifetime of LED	40.000hrs-L80
Warranty	5 Years