



Rival



Rival ceiling light is big in size, with up & down lighting design. It adopted high lumen SMD LED light source, larger lighting area and low glare design makes a softer and uniform light output. AL6063 aluminum housing provides an excellent thermal management.

Technical Data

Model No.	RIVAL-16-40W
Power Consumption	40W
Input Voltage	AC200 - 240V
Power Factor	0.9
Control	DALI

Key features

- 3CCT in one lamp, light color can be selected by slide button
- Triac Dimmable version available
- Surface mounted version and pendant version is optional
- Built-in driver

Applications


- Office
- Hotel
- Stairway
- Lobby
- Reception
- Corridors

Optic Information

LED Type	SMD
Luminous Flux	3600 - 4200lm
Correlated Color Temperature	3-CCT: 3000K + 4000K + 5700K
Color Rendering Index	Ra80
Beam Angle	120°

Dimensions and Mounting


Product Dimension	Ø400x86mm (Cutout: Ø220-250mm)
Luminaire Net Weight	3.2kg
Mounting Option	Surface mount / Recessed
Material	Aluminum Alloy (AL6063)
Finish Color	White RAL 9016 /Black RAL 9005
Protection Class	Class 1
IP Rating	IP40

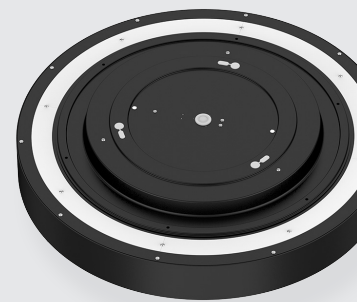

Lifespan and Warranty

Operating Temperature	-20°C to 45°C
Storage Temperature	-20°C to 65°C
Lifetime of LED	50.000hrs-L80
Warranty	5 Years

Dimensions



Type	A (mm)	B (mm)	C (mm)	D (mm)
RIVAL-16-40W	400	86	55	219