




# Dalton

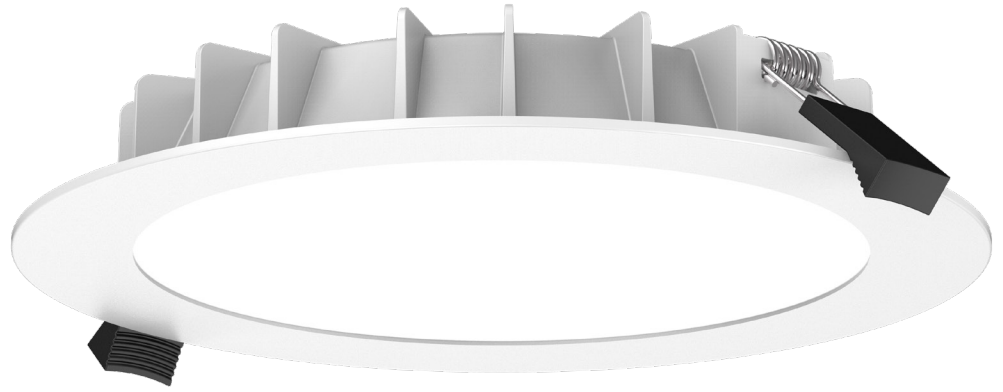

Dalton LED downlight with super slim design, adopting high lumen SMD LED, PC diffuser ensures uniform light. ADC12 Aluminum provides excellent heat dissipation.


## Technical Data

<b>Model No.</b>	DALTON-6-12W	DALTON-8-25W
<b>Power Consumption</b>	12W	25W
<b>Power Supply</b>	Tridonic, Eaglerise	
<b>Input Voltage</b>	AC200 - 240V	
<b>Power Factor</b>	0.9	
<b>LED Driver</b>	Built-out	

## Dimensions and Mounting

<b>Product Dimension</b>	Ø190x30mm	Ø225x34mm
<b>Luminaire Net Weight</b>	0.5kg	0.65kg
<b>Mounting Option</b>	Recessed	
<b>Material</b>	Aluminum Alloy (ADC12)	
<b>Finish Color</b>	White RAL 9016 / Black RAL 9005	
<b>Protection Class</b>	Class 2	
<b>IP Rating</b>	Cover IP54	

Type	A (mm)	B (mm)	C (mm)	D (mm)
DALTON-6-12W	190	30	152	143
DALTON-8-25W	225	34	185	173



## Key features

- Super slim design
- IP54 front waterproof
- External driver

## Applications

- Office
- Stairway
- Lobby
- Reception
- Corridors

## Optic Information

<b>LED Type</b>	SMD	
<b>Luminous Flux</b>	1100 - 1220lm	2130 - 2380lm
<b>Correlated Color Temperature</b>	4000K (optional 3000, 5000, 5700K)	
<b>Color Rendering Index</b>	Ra80	

## Lifespan and Warranty

<b>Operating Temperature</b>	-20°C to 45°C
<b>Storage Temperature</b>	-20°C to 65°C
<b>Lifetime of LED</b>	50.000hrs-L80
<b>Warranty</b>	5 Years

## 3-CCT in 1 Lamp

