




# Ozon

Surface-mounted LED downlight featuring a 2835SMD LED chip and PMMA LGP for excellent light transmittance. The die-casting aluminum frame ensures efficient thermal management. The ultra-slim profile is ideal for various working spaces.

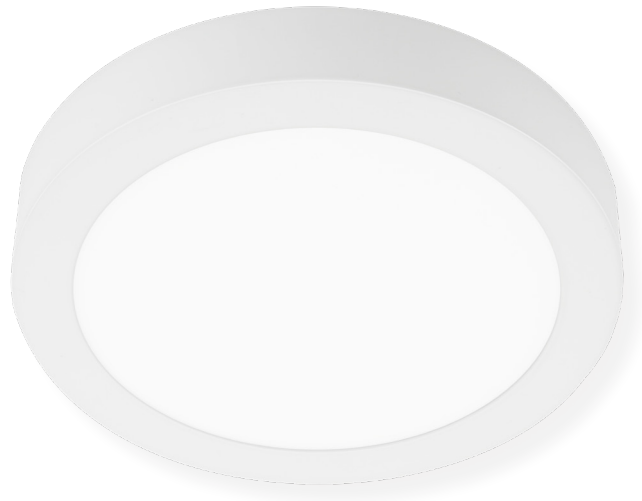


## Technical Data

<b>Model No.</b>	OZON-12W-R
<b>Power Consumption</b>	12W
<b>Input Voltage</b>	AC200 - 240V
<b>Power Factor</b>	0.9
<b>LED Driver</b>	Included
<b>Dimmable</b>	Non-dimmable

## Dimensions and Mounting

<b>Product Dimension (mm)</b>	Ø170x138mm
<b>Luminaire Net Weight</b>	0.45kg
<b>Mounting Option</b>	Surface mount
<b>Material</b>	Aluminum + PC
<b>Finish Color</b>	White RAL 9016
<b>Protection Class</b>	Class 2
<b>IP Rating</b>	IP20

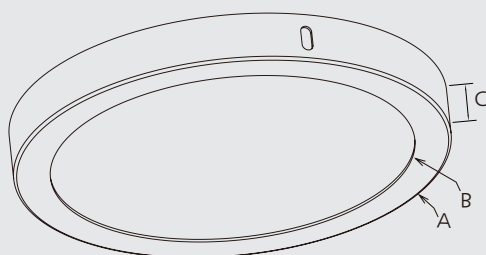

A:170mm x B:125mm x C:38mm

## Key features

- Super slim design
- Ultra slim design
- Die casting aluminium

## Applications

- Office
- Shopping mall
- Hotel
- Restaurant
- Hospital

## Optic Information

<b>LED Type</b>	SMD
<b>Luminous Flux</b>	810-950lm
<b>Correlated Color Temperature</b>	3000K
<b>Color Rendering Index</b>	Ra80
<b>Beam Angle</b>	120°

## Lifespan and Warranty

<b>Operating Temperature</b>	-20°C to 40°C
<b>Storage Temperature</b>	-20°C to 65°C
<b>Lifetime of LED</b>	40.000hrs
<b>Warranty</b>	3 Years