



# Latte IP54

Recessed LED luminaire designed for plaster-board ceilings, offering IP54 protection. Features an opal diffuser for uniform light distribution, ideal for environments requiring enhanced protection.

## Application & Mounting

**Application:** Social room, Corridor and staircase, Bathroom, Reception, Cloak room, Technical room, Security

**Mounting:** Ceiling mounted, Wall mounted

## Mechanical Data

Type of installation	Ceiling mounted
Housing material	Plastic

## Electrical Data

Light source	LED
Luminaire power	19 - 46 W
Type of equipment	AC
Voltage rating	220 - 240 V
Type of driver	DALI, ON/OFF
Optional	Emergency module, Motion sensor

## Light Data

Luminous Flux	1590 - 5800 lm
Efficacy	84 - 126 lm/W
Correlated Color Temperature	3000K, 4000K
Color Rendering Index	Ra80, Ra90
Lifetime L80B10 @25°C	100.000 h
MacAdam	SDCM 3
IP Rating	IP54
IK Rating	IK07

## Optical Data


Louver/ diffuser	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic
UGR	17, 18

## Information Data

Net weight	1.7 - 3.3 kg
Colour	White

## Dimensions

L (mm)	W (mm)	H (mm)
330 / 1160	110 / 160 / 330	85 / 90

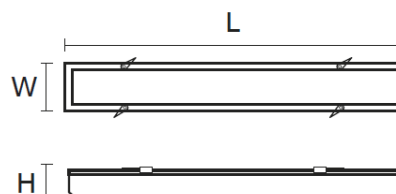

## Accessories



Electric suspension kit



Suspension kit 1x